

Date

User

End user weight (kg)

Language user manual

UK (English)

Company stamp

CRASH TEST APPROVED

Folding frame wheelchair

£ 2404,00

Retail price - VAT not included

Wheelchair measures

Seat width (LS) ☐ 33 ☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48

Seat depth (PS) ☐ 35 ☐ 37,5 ☐ 40 ☐ 42,5 ☐ 45 ☐ 47,5

Footplate distance (DP) (cm) $\pm 0.5\text{cm}$ - adjustment steps 1.5cm
(Real distance between seat and footplate) - IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm.)

Setting ☒ Standard ☐ Prudential ☐ Active ☐ Extreme

Backrest Height (TS) Std.Value 36 (min 30-max 54) adjustment steps 1.5cm

Crossbrace (black) ☒ Single ☐ Double (Not seat width 33-36)

Front height (STD 49) - Rear height (STD 44)

SAFETY

☐ 4 points tie-down system rings


NOT AVAILABLE WITH: Aluminium frame DYNAMIC 2.0 - Titanium frame T MAX



08654

189,00


Rear frame

Aluminium frame		☒ Aluminium standard frame - Same colour of front frame The real seat depth, from the front part of the seat cloth to the backrest tube will be 1 cm more than the declared one. camber ☒ 0° ☐ 1,5° ☐ 3°		
		☐ Aluminium frame DYNAMIC 2.0 - (COLOUR: BLACK) The real seat depth, from the front part of the seat cloth to the backrest tube will be 1,5 cm more than the declared one. With rake adjustable backrest ($\pm 9^\circ$) Exclude the installation of : Brake handles for companion (Drum Brake) - 4 points tie-down system rings camber ☒ 0° ☐ 1,5° ☐ 2° ☐ 4°	09955	315,00
Titanium frame TMAX		Titanium frame T MAX The real seat depth, from the front part of the seat cloth to the backrest tube will be 1 cm more than the declared one. Brushed Titanium frame - not varnished Weight reduction approx. 250gr Exclude the installation of : 4 points tie-down system rings camber ☒ 0° ☐ 1,5° ☐ 3°	03940	372,00

Front frame

- ☐ Short frame - Ideal with Seat depth (PS) 35 - 37,5
- ☐ Medium frame - Ideal with Seat depth (PS) 40 - 42,5
- ☐ Long frame - Ideal with Seat depth (PS) 45 - 47,5

Frame Angle



★ 110°

☐ 120°☐ 95°

- ☐ Elevating front frame, swing away and removable
- Include calf supports and plastic footrest with heel band**
 (not available for seat width 33)
 Minimum footplate distance 25cm.



09730

252,00

Frame colour (aluminium)

- ★ Opaque black
- ☐ Bright silver ☐ Bright anthracite ☐ Bright blue ☐ Bright blue china
- ☐ Bright fuchsia ☐ Bright orange ☐ Bright lime ☐ Pearl white ☐ Bright red

Backrest

- ★ Adjustable velcro straps and padded transpiring upholstery

Handle tube

- ★ Tubes with standard handle
- ☐ Folding handles



02958

252,00

Date	Order	User	Address
Colour set: Rear wheels and forks - To be matched only with: Rear wheels Ultra-light Progeo - Standard!			
☆ Black	22" 24" 25" 26"		
○ Bright silver	22" 24"	00833	126,00
○ Bright anthracite	24"	00833	126,00
○ Bright orange	22" 24"	00833	126,00
○ Bright fuchsia	22" 24"	00833	126,00
○ Bright blue	22" 24"	00833	126,00
○ Bright red	22" 24"	00833	126,00
○ Bright lime	22" 24"	00833	126,00
○ Pearl white	22" 24"	00833	126,00
Casters			
☆ 5" Soft			
□ 4" Soft			
□ 3" Sport			
□ 6" Soft	Not available with frame angle 95°		
□ 6" Pneumatic	Not available with frame angle 95°		
□ 7" Soft	Not available with frame angle 95°		
○ 3" Active Soft (wide)	(Aluminium alloy rim)	06824	126,00
○ 4" Active Sport (narrow)	(Aluminium alloy rim)	01398	126,00
○ 4" Active Soft (wide)	(Aluminium alloy rim)	03943	126,00
○ 5" Active Soft (wide)	(Aluminium alloy rim)	07518	126,00
○ 5" Pneumatic		10844	63,00
Rear wheels			
☆ 24" Ultra-light Progeo - Standard!			
□ 22" Ultra-light Progeo - Standard!			
□ 25" Ultra-light Progeo - Standard!	(colour: black)		
□ 26" Progeo - Standard!	(colour: black)		
○ 24" ULTRA-LIGHT PROGEO KEY SPORT	Weight reduction approx. 450gr.	04383	876,00
○ 24" Ultra-light "Spinergy LX"		01685	876,00
○ 24" Ultra-light "Spinergy LXL"	□ Black hub and white spokes	07846	876,00
○ 24" Ultra-light "Spinergy Flex rim"	□ Hub and spokes black	02270	1.374,00
○ 25" Ultra-light "Spinergy LX"		02101	876,00
○ 25" Ultra-light "Spinergy LXL"	□ Black hub and white spokes	07847	876,00
○ 26" Ultra-light "Spinergy LX"		02102	876,00
○ 24" Off-road (aluminium handrim black)		01392	224,00
○ 22" with brake handles for companion (drum brake) (aluminium handrim)		03385	360,00
Available only with camber 0°			
Not available with Frame Dynamic 2.0			
○ 24" with brake handles for companion (drum brake) (aluminium handrim)		03384	360,00
Available only with camber 0°			
Not available with Frame Dynamic 2.0			
○ One arm drive - (24" rear wheels Aluminium handrim High pressure Tyre) - camber 0°			
○ Right	○ Left	02103	401,00
Rear wheel tyre			
☆ High pressure tyre	(22"-24"-25"-26")		
□ High pressure profile tyre	(24")		
○ Marathon Plus	(24"-25")	01669	63,00
○ Anti-puncture - Colour Black	(24")	11083	126,00
○ Anti-puncture - Colour Grey	(22")	04181	98,00
Handrim			
Wheel distance ☆ 3 cm □ 4 cm			
☆ Aluminium	(22"-24"-25"-26")		
○ Aluminium black SOFT-TOUCH	(24"-25")	09170	126,00
○ Chromed Steel	(24"-25")	01684	148,00
○ Titanium	(24"-25")	00016	275,00
○ Ultra Grepp	(24"-25")	00017	315,00
○ Max Grepp	(24"-25")	00834	349,00
○ Ergo Para	(24")	00632	349,00
○ TOP FRICTION	(24"-25")	11023	399,00
Oval countour with a rubber insert			
○ NOVA H	(24"-25")	11025	263,00
Ergonomic black profile			
○ NOVA D	(24"-25")	11026	286,00
Ergonomic profile with rubber coating (ideal for quadriplegics)			
○ SURGE LT	(25")	06427	360,00
○ Quad	(24")	00693	200,00
○ Silicon cover for standard aluminium handrim		04050	160,00
Available for measures (22"- 24" - 26")			

Date Order User Address

Wheel locks

☆ Bent lever push to lock

- ☐ Straight lever push to lock
☐ Straight lever pull to lock

☐ Sport brake

- ☐ Brake with extension lever push to lock
☐ Brake with extension lever pull to lock



06428 126,00

01949 63,00
03372 63,00

Footplate (Not available with Elevating front frame, swing away and removable) - See reference tables N°3

☆ Plastic footrest, rake adjustable

Not available with Elevating front frame, swing away and removable

Minimum footplate distance 27cm.

☆ 2/3 Internal ☐ 2/3 External



11525 no list

☐ One piece footplate - Flip-up! rake and depth adjustable

Not available with Elevating front frame, swing away and removable

Minimum footplate distance 26cm.

☐ Internal ☆ 2/3 Internal ☐ External



11527 no list

☐ Minimum footplate distance 21cm. Available only with Multi-function and rotative system - 03945 189,00

☐ One piece aluminium footplate - Flip-up! rake and depth adjustable

Not available with Elevating front frame, swing away and removable

Minimum footplate distance 26cm.

☐ Internal ☆ 2/3 Internal ☐ 2/3 External ☐ External



11528 no list

☐ One piece Carbon fibre footplate rake adjustable, swing away, flip-up.

Not available with Elevating front frame, swing away and removable

Minimum footplate distance 26cm.

☆ Internal ☐ External




03291 275,00

Mudguard**Mudguard - FIXED**

☆ ABS mudguard

☐ ABS Straight sideguard

- ☐ Carbon fibre mudguard
☐ Carbon fibre Straight sideguard



03946 315,00
08918 315,00

Mudguard - REMOVABLE

☐ Removable ABS mudguard

08921 126,00

☐ Removable ABS fibre straight sideguard

08921 126,00

☐ Removable carbon fibre mudguard

08919 435,00

☐ Removable Carbon fibre straight sideguard

08920 435,00

**Armrests**

☐ Tubular armrests

(Swing away, removable and height adjustable armrest)

- ☐ Standard Support (Not with frame Dynamic)
☐ Steel support with safety locking system



04828 177,00
00694 252,00

Removable armrest with ABS mudguard

☐ Desk armrests PROGEO

(Removable and height adjustable)

Not available with Frame Dynamic 2.0 + camber 4°



09956 224,00

☐ Removable armrest with ABS straight sideguard

08881 224,00

☐ Removable armrest with carbon-fiber straight sideguard

08882 453,00



Date	Order	User	Address
Accessories			
☐ Pad for front frame protectors		07058	52,00
☐ Backrest-seat connection cloth		10241	17,00
☐ Removable storage bag (with quick coupling)		09811	126,00
Optional 1			
☐ Transit wheels		 00836	148,00
☐ Anti-tipper with rapid hookup	(inside rotation to reduce the encumbrance) ☐ Right ☐ Left	 00023 00024	126,00 126,00
☐ Tipping aid	☐ Right ☐ Left	 00025 01046	74,00 74,00
☐ Crutches support	☐ Right ☐ Left	 00838 00837	74,00 74,00
Optional 2			
☐ Tetracrip	(Quick release axle for quadriplegic)		03947 177,00
☐ Rear wheels plate extension	(Not with frame Dynamic 2.0)		01950 177,00
☐ Handybike adaptor	(Not with frame Dynamic 2.0)		00506 74,00
☐ Push handles for companion	(Removable and height adjustable)	 01048	189,00
☐ Harness			04103 126,00
☐ Safety pelvic belt			03972 63,00
☐ Tray table (removable)			00508 275,00
☐ Lumbar support	(to insert in the backrest upholstery)		00013 40,00
☐ Super Head rest	(Folding with the wheelchair)	 04049	453,00
☐ Swing away lateral support	☐ Right ☐ Left	 02097 02098	252,00 252,00
Not available with Posture backrest PHYSIO			
☐ Spoke guards Black	(22"-24")		01043 148,00
☐ Spoke guards Transparent	(22"-24")		00835 148,00
☐ Spoke guards Progeo design	(22"-24")		00019 177,00
☐ Spoke guards Dragon	(22"-24")		02106 177,00
Additional Kit			
☐ 24" Off-road rear wheels	Off-Road tyre - aluminium handrim (black colour)	03378	498,00
☐ 24" FAT rear wheels	FAT tyre 3" - aluminium handrim (black colour)	09357	876,00


Date Order User Address

PHYSIO - Posture backrest (Std. Backrest upholstery not provided)

Removable with quick release
Suitable for tubes with diameter 18÷26mm
Depth adjustment (4cm)
Angle adjustment ($\pm 18^\circ$)


☐ **AIR** Carbon shell

not available for seat width 48

BACKREST HEIGHT		28		34		40	
Shell's shape		Lateral retaining wing A=high - R=regular					
7.5 cm 	A	R	A	R	A	R	
							
	☐	☐	☐	☐	☐	☐	

1.047,00

☐ **POSTURE** Aluminum shell

BACKREST HEIGHT	34	40	52
Shell's shape	Lateral retaining wing B=regular		
	R	R	R
7,5 cm 			
	☐	☐	☐

1.013,00

Configuration DEEP with side support PAD (height adjustable)

☐ Aluminum lateral with padded, breathable upholstery.



Small (h 13cm)



☐ Right
10272

29,00



☐ Left
10272

29,00

Large (h 20cm)



☐ Right
10273

40,00

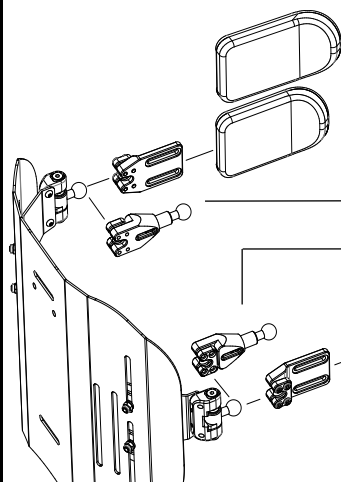


☐ Left
10273

40,00

SWING AWAY - Lateral support

Fixing and adjustment hardware complete with protection sleeve
Aluminum lateral with padded, breathable upholstery.



☐ Large (18x12)

05647 183,00

☐ Small (14x9)

05643 183,00

☐ Lateral support extension

Quantity (number pcs).....

☐ Lateral support extension

Quantity (number pcs).....

☐ Small (14x9)

05642 183,00

☐ Large (18x12)

05646 183,00

☐ Headrest adjustable - Double ball mounting system
Available only with backrest Physio
Not available for backrest Physio AIR carbon shell

☐ Large (34x14)
☐ Small (28x14)



05648 252,00

Permobil LimitedUnit 7, Polaris Centre, 41 Brownfields,Welwyn Garden City, Herts, AL7 1ANUnited Kingdom - Phone: +44 1484 722888

Date.....Order.....User.....Address.....

Note

Wheelchair : Progeo EXELLE VARIO - Rev. 2023.1

Prices - VAT excluded
to be added to the price list

Send this page only if any optional have been chosen

☆standard.....(supplied if no requests are indicated)


□on request.....(without extra charge)

○optional.....(cost to be added at the basic price)

customer_support_uk@permobil.com - https://www.permobil.com/en-gb

REFERENCE TABLES

1	Front height	
With closed frame (95°) max 5" caster		
Casters	Front height	
	min.	max
3"	41	52
4"	42	53
5"	44	54
6"	48	55
7"	49	56
The size of the fork will be defined only by Progeo in accordance with wheelchair final configuration.		

2	Rear height				
	Rear frame	Rear wheels			
		22"	24"	25"	26"
STANDARD	Straight plate	min. 37	min. 39	min. 40	min 41
		max 45	max 47	max 48	max 49
	Shaped plate	min. 36	min. 38	min. 39	min. 40
		max 49	max 51	max 52	max 53
DYNAMIC 2.0		min. 36	min. 38	min. 39	min. 40
		max 49	max 51	max 52	max 53

3	Footplate option	Frame Angle 110°	Footplate distance Frame Angle 120°	Frame Angle 95°
	Plastic footrest	min. 27	min. 27	min. 27
	One piece footplate - Flip-up!	min. 24	min. 26	min. 24
	One piece footplate - Flip-up! , with multifunction rotative system	min. 19	min. 21	min. 19
	One piece aluminium footplate - Flip-up!	min. 24	min. 26	min. 24
	One piece Carbon fibre footplate	min. 24	min. 26	min. 24
Calculated with the best configuration and with the footplates positioned on inside.				
IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm.)				

4	Rear wheels	
	Model	Features
	22" Ultra-light Progeo - Standard!	(not available in anthracite color)
	24" Ultra-light Progeo - Standard!	(available for all couloers)
	24" ULTRA-LIGHT PROGEO KEY SPORT	(silver hub, black rim and 16 spokes)
	24" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	24" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes) - (black hub, rim and 18 spokes)
	24" Ultra-light "Spinergy Flex rim"	(silver hub, black rim and spokes) - (integrated aluminium/rubber handrim - encumbrance reduction up to 3cm. - all tyre)
	24" Off-road	(colour: black) - (aluminium handrim - tyre Off-road)
	25" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	25" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes)
	26" Progeo - Standard!	(colour: black)
	26" Ultra-light "Spinergy LX"	(silver hub, black rim and 18 spokes)